

# ENHANCE

NATURAL STONE COLOR

# RESTORE

PAVER BEAUTY

# PROTECT

YOUR INVESTMENT



## Building Trust from the Ground Up.

# Decide Guide


## Finding the Perfect Finish

Natural, matte or wet look, what is your paver preference? SRW Paver Seal™ products are sure to exceed your expectations. SRW's Penetrating sealer creates an invisible protective barrier. Our Low Gloss and High Gloss sealers are designed to solidify joint sand, protect your investment and enhance paver color.



## Seal to Protect Your Investment

As demonstrated with PSX Penetrating X-treme in these photos, sealing your pavers will create a remarkably protective barrier to keep damaging moisture, chemicals and dirt locked out of your pavers.

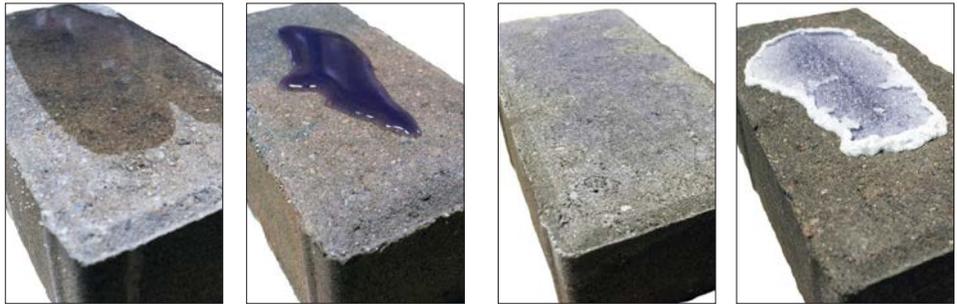

Salt water seeps into unsealed paver (left) but pools on top of sealed paver (right) keeping damaging moisture and elements locked out.

Damaging salt leeches into unsealed paver (left) but dries on the surface of the sealed paver (right).

### Not Sure Which Sealer to Use?

Please review this chart.

### Questions?

Visit [www.SRWproducts.com](http://www.SRWproducts.com) for more product information or call 800-752-9326.

### SRW PAVER SEAL™ APPLICATION CHART

	Surface Material												Benefits						
	Pavers	Masonry	Concrete	Wet-Cast	Cultured Stone	Granite	Limestone	Marble	Bluestone	Sandstone	Clay	Interior	Exterior	Retaining Wall	Enhancing	Penetrating	Reduce Salt/Frost Damage	Joint Sand Stabilizer	UV Resistance
<b>(PS)</b> Penetrating	X	X	X	X	X	X			X	X	X	X	X	X		X	X		X
<b>(LG)</b> Low Gloss	X	X	X		X		X	X				X	X	X	X		X	X	X
<b>(HG)</b> High Gloss	X	X	X		X		X	X				X	X	X	X		X	X	X
<b>(PSX)</b> Commercial	X	X	X	X	X	X			X	X	X	X	X	X		X	X		X
<b>(HGX)</b> Commercial	X	X	X		X		X	X				X	X	X		X	X		X

Not recommended for use on smooth or polished surfaces. Always test a small area. Refer to paver manufacturer's recommendations on whether or not to seal.

# Paver Seal Products

## Easy 4-Step Process


All of our SRW sealers feature a simplified 4-step process to save you time and money. Look for this guide on each label. SRW prides itself on offering user-friendly (yet detailed) instructions to assist in the success of your paver and concrete projects.



Follow these directions for application of:



### EASY 4-STEP PROCESS

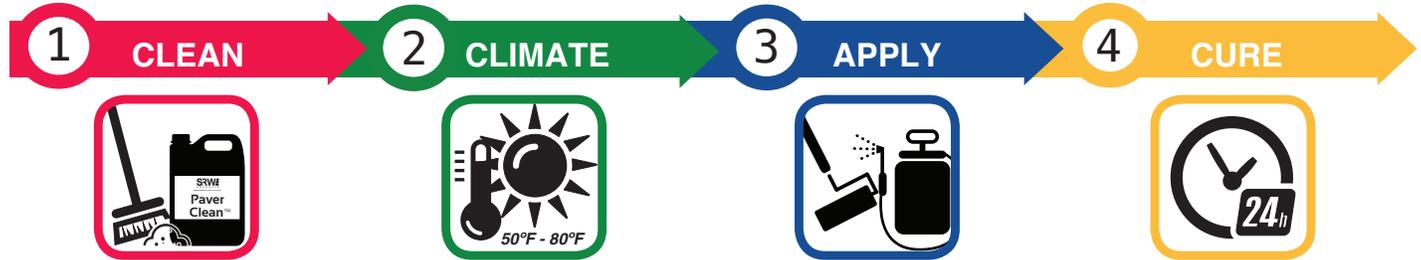

- Wait 28 days after installing polymeric sand before sealing.
- Thoroughly sweep surface of joint sand or loose material.
- Prepare pavers with SRW Paver Clean products prior to sealing.

- After cleaning, wait at least 24 hours before sealing. Surface and joints must be completely dry.
- Recommended application temperatures are 50°F (10°C) to 80°F (27°C).
- Do not apply if inclement weather is forecasted within 24 hours.

- **STIR THOROUGHLY.**
- Apply with an SRW Products approved sprayer and Slit Foam Roller.
- For best results, spray then back roll. This prevents an uneven finish. A 2-person application is recommended.
- Start at the highest project elevation.
- Do not allow sealer to pool on pavers or in joints.

- Repeat if desired.
  - Allow sealed area to dry and cure 24 hours.
  - Protect from water and rain until dry
  - Dry-tack free: 25 minutes
  - Foot traffic: 24 hours
  - Vehicle traffic: 72 hours
- (Note: All calculations based on 68°F - 77°F)

## PS Penetrating Coverage up to 200 sq. ft. per gallon\*



Available in 1 & 5 gal. containers



### FEATURES

- Invisible/natural look finish
- Seals and protects
- Interior/exterior applications
- Breathable
- Resists yellowing of the surface
- Minimizes salt and freeze/thaw damage



Directions above

### PS PAVER SEAL™

PS Paver Seal is a natural-look penetrating sealer, used to protect and seal any clean and dry cementitious surface, above ground, vertical or horizontal. It protects the surface against damaging effects of water intrusion, acid rain, deicing chemicals, freeze/thaw exposure, airborne dirt and smog.

PS Paver Seal is easy to apply, it retains the original appearance of the pavers, retaining wall block, bluestone, slate, granite and cultured stone with a non-yellowing UV resistant finish.

### CLEAN-UP & STORAGE

Clean with soap and warm water. **KEEP FROM FREEZING.** Store container in a cool area with cap or lid firmly in place.

### USER TIPS

See full instructions above.

Always follow paver manufacturer's sealing and timeline recommendations. If using on cultured stone, ask stone dealer about cleaning procedures prior to application.

### DO NOT:

- Apply to structures under hydrostatic pressure
- Use on limestone or clay pavers/brick
- Use more than one sealer on the same project

\*Coverage may vary depending on surface and application

# Paver Seal

## LG Low Gloss

Coverage up to 150 sq. ft. per gallon\*



Available in 1 & 5 gal. containers



### FEATURES

- Low gloss finish
- Water based
- Interior/exterior
- Breathable
- Enhances, restores & protects
- Sand stabilizer



Directions on page 3

### LG PAVER SEAL™

LG Paver Seal is a low gloss paver sealer and sand stabilizer. It provides a clear barrier that extends paver life by protecting against elements that stain and deteriorate paver appearance, such as rust, dirt, pool chemicals, salt and everyday weathering.

LG Paver Seal also stabilizes joint sand, adding protection against sand washout, weed growth and ant infestation. In one application LG Paver Seal can easily be applied to pavers, retaining wall block, stone and limestone.

### CLEAN-UP & STORAGE

Clean with soap and warm water. KEEP FROM FREEZING. Store container in a cool area with cap or lid firmly in place.

### USER TIPS

See full instructions on page 3.

Always follow paver manufacturer's sealing recommendations. If using on cultured stone, ask stone dealer about cleaning procedures prior to application. Care should be taken for vertical surface application where runs may alter the finish. A light purple/amber color is common during the curing period. For more sheen, apply a second thin coat, four hours after first coat. Do not over apply. For added slip resistance, use SRW SR Paver Grip.

### DO NOT:

- Use on clay pavers/brick, granite, bluestone, slate or wetcast
- Apply to structures under hydrostatic pressure
- Use more than one sealer on the same project

## HG High Gloss

Coverage up to 150 sq. ft. per gallon\*



Available in 1 & 5 gal. containers



### FEATURES

- Wet look, high gloss finish
- Water based
- Interior/exterior
- Breathable
- Enhances, restores & protects
- Sand stabilizer



Directions on page 3

### HG PAVER SEAL™

HG Paver Seal is a wet look, high gloss paver sealer and sand stabilizer. HG Paver Seal provides a clear barrier that extends paver life. It protects pavers against elements that stain and deteriorate paver appearance, such as rust, oil, dirt, pool chemicals, salt and everyday weathering. HG Paver Seal also stabilizes joint sand, adding protection against sand washout, weed growth and ant infestation. In one application, HG Paver Seal can be easily applied to pavers, retaining wall block and limestone.

### CLEAN-UP & STORAGE

Clean with soap and warm water. KEEP FROM FREEZING. Store container in a cool area with cap or lid firmly in place.

### USER TIPS

See full instructions on page 3.

Always follow paver manufacturer's sealing recommendations. If using on cultured stone, ask stone dealer about cleaning procedures prior to application. Care should be taken for vertical surface application where runs may alter the finish. For a deeper sheen, apply a second thin coat, four hours after first coat. Do not over apply. For added slip resistance, use SRW SR Paver Grip.

### DO NOT:

- Use on clay pavers/brick, granite, bluestone, slate or wetcast
- Apply to structures under hydrostatic pressure
- Use more than one sealer on same project

\*Coverage may vary depending on surface and application

# X-treme Sealers

## Commercial Grade Products

### HGX High Gloss X-treme

Coverage up to 250 sq. ft. per gallon\*



Available in 1 & 5 gal. containers



#### HGX CURE & SEAL

HGX Cure & Seal is a wet look, high quality paver sealer and sand stabilizer. This product provides a clear barrier that extends paver life. It protects any commercial or industrial high traffic area against elements that stain and deteriorate paver appearance, such as rust, dirt, pool chemicals, salt and everyday weathering. HGX Cure & Seal also stabilizes joint sand, adding protection against sand washout, weed growth and ant infestation. In one application, this product can easily be applied to pavers, retaining wall block and many natural stone applications.

#### CLEAN-UP & STORAGE

Clean with SRW Paver Clean XY Xylene Solvent. Store container in a cool area with cap or lid firmly in place.

#### USER TIPS

See full instructions on page 3.

- Always follow paver manufacturer's sealing recommendations.
- If using on cultured stone, ask stone dealer about cleaning procedures prior to application.
- If using on exposed aggregate, follow removal of surface retarder. Allow surface water to dissipate.
- For a deeper sheen, apply a second thin coat, 4 hours after first coat. Do not over apply.
- For added slip resistance, use SRW SR Paver Grip.

#### DO NOT:

- Apply to structures under hydrostatic pressure
- Use more than one sealer on the same project
- Use on clay pavers/brick, wetcast or bluestone

#### FEATURES

- Wet look, high gloss finish
- Breathable
- Enhances, restores & protects
- Protects joint sand from washout, weeds and ants
- Ideal for high-traffic areas



Directions on page 3

### PSX Penetrating X-treme

Coverage up to 200 sq. ft. per gallon\*



Available in 1 & 5 gal. containers



#### PSX PAVER SEAL™

PSX Paver Seal is a natural looking extreme penetrating sealer. PSX Paver Seal is used to protect and seal any commercial or industrial high traffic area that is clean, contains a dry cementitious surface and is above ground. It can be applied in vertical or horizontal application. It protects surfaces against damaging effects of water intrusion, acid rain, deicing chemical, freeze/thaw exposure, airborne dirt and smog. PSX Paver Seal is easy to apply, it retains the original appearance of pavers, retaining wall block, bluestone, slate, granite and cultured stone with a non-yellowing UV resistant finish.

#### CLEAN-UP & STORAGE

Clean with soap and warm water. **KEEP FROM FREEZING.** Store container in a cool area with cap or lid firmly in place.

#### USER TIPS

See full instructions on page 3.

- Always follow paver manufacturer's sealing and timeline recommendations.
- If using on cultured stone, ask stone dealer about cleaning procedures prior to application.

#### DO NOT:

- Apply to structures under hydrostatic pressure
- Use on limestone or clay pavers/brick
- Use more than one sealer on the same project

#### FEATURES

- Invisible/natural look finish
- Seals and protects
- Ideal for high-traffic areas
- Breathable
- Resists yellowing of the surface
- Minimizes salt and freeze/thaw damage



Directions on page 3

\*Coverage may vary depending on surface and application

# Additional Products

## SR Paver Grip



Available in 3.2 oz packages



### SR PAVES GRIP™

SR Paver Grip is a slip-resistant polypropylene aggregate that can be added to HG or LG Paver Seal to create a textured surface, improving slip resistance. The particles are light-weight and clear, keeping them in suspension longer than other aggregates and is not visible when dry. Paver Grip can be used in solvent or water-based film form coatings:

→ SRW Paver Sealer Product Mix - LG, HG, HGX and HGX VOC

→ SRW Cure & Seal Product Mix - Green, Green Voc, Select, Select VOC, X-TREME and X-TREME VOC.

### DIRECTIONS

**Mixing:** Add the contents of this bag to 1-gallon of Paver Seal. Mix until aggregate is distributed uniformly throughout entire liquid. Periodically stir during use to assure uniform distribution.

**Application:** Before using this product, thoroughly read product label. Follow application instructions for the sealer being applied. When using Paver Grip, SRW recommends rolling product on with the second application of sealer. Do not re-roll wet areas.

## Hudson Sprayers

### Acetone:

This heavy-duty acetone sprayer is designed and built specifically for use with acetone based products.

### Use with:

→ SRW Paver Seal™ Products:  
PS, PSX, LG and HGX VOC

### Spray Thick:

This sprayer sprays up to 35% solids.

### Use with:

→ SRW Paver Seal™ Products:  
PS, PSX, LG, HG and HGX



## Slit Foam Roller



SRW Slit Foam Roller remains spongier during usage and is great for textured surfaces. It is recommended for use with any of SRW sealer lines. Not to be used with SRW XY Xylene or SS Sealer Stripper.

- Applies SRW Paver Seal evenly
- Works great on textured surfaces
- Remains spongy and will not compress



## XY Xylene

A fast acting solvent used to thin and dissolve acrylic sealers. Used to aid in the cleanup of tools and over-spray.

Available in 1 & 5 gal. containers



## SS Sealer Stripper

An industrial strength biodegradable sealer stripper. Used to aid in the removal of sealing and curing compounds. Estimated coverage is 200 sq. ft. per gallon. Available in 1 & 5 gal. containers



## General Cleaners

**A MUST USE PRODUCT FOR SEALER PREPARATION\*\***



**PW Paver Wash**

This product is essential for cleaning before you seal. PW Paver Wash prepares the surface for sealing and restores original paver color.

\*\*Not for use on sealed surfaces




**EF Efflorescence**

EF Paver Clean is a product which acts quickly to dissolve efflorescence (white mineral deposits) and polyhaze (white cloudy appearance) that dulls pavers.

\*\*Not for use on sealed surfaces

## Spot Cleaners

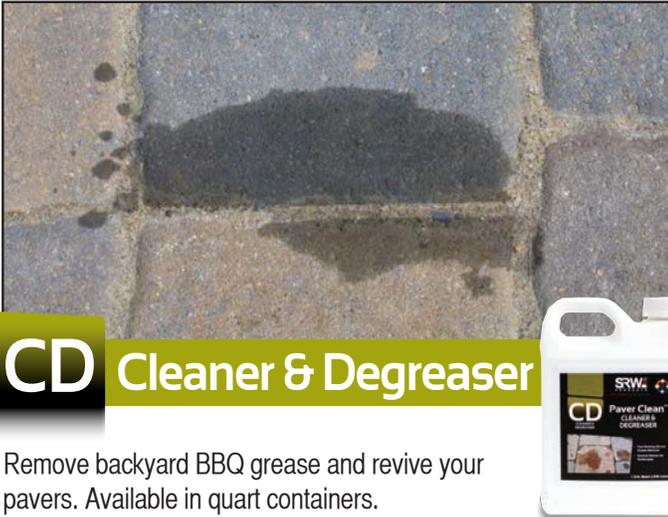

**CD Cleaner & Degreaser**

Remove backyard BBQ grease and revive your pavers. Available in quart containers.

- Fast working oil and grease remover
- General cleaner for hardscapes



**RE Rust Eliminator**

Rejuvenate pavers and remove stubborn rust stains. Available in quart containers.

- Spot treatment for stubborn rust stains
- Restores paver color

## Multiple Products Multiple Solutions

*We've got you covered.*

Our product managers and customer service specialists are **THE BEST** in the industry. We're committed to your success. So, the next time you have a question,

**JUST ASK! 1-800-752-9326**

[www.SRWproducts.com](http://www.SRWproducts.com)



## PAVER SEAL™ FAQ

Get answers to our most commonly asked questions. Have a question not answered here? Call 800-752-9326 or e-mail [customerservice@srwproducts.com](mailto:customerservice@srwproducts.com)

### CAN I USE SRW PAVER SEAL PRODUCTS IMMEDIATELY AFTER INSTALLING POLYMERIC SAND?

SRW recommends waiting at least 28 days after installation of polymeric sand.



### CAN I SEAL IF RAIN IS IN THE FORECAST?

SRW recommends a clear forecast for at least 24 hours before and after a sealer application.



### IS IT NECESSARY TO USE A SPRAYER TO APPLY SRW SEALER PRODUCTS?

While you can successfully apply SRW sealers using only a Slit Foam Roller, it is highly recommended that a sprayer is used to apply an even coat.

A second person would then follow the sprayer with a slit foam roller to prevent sealer from pooling in the textured surface or joints between the pavers.

### CAN I SEAL MY PAVERS RIGHT AFTER THEY'VE BEEN INSTALLED?

SRW recommends waiting 60-90 days from the manufactured date of the pavers. The manufacture date is provided on the pallet label. SRW always recommends using SRW Paver Wash or Efflorescence cleaner prior to sealing.

### IS IT NECESSARY TO USE AN SRW SLIT FOAM ROLLER?

Yes. It helps to evenly distribute sealer across a textured surface. It will also help prevent sealers from pooling in lower areas.



### CAN I SEAL NATURAL STONE?

SRW provides a sealer for almost every surface. Please review product label chart inside.

